

## LT9602

### SPECS

<b>Product #</b>	LT9602
<b>Wattage</b>	3.5W
<b>Voltage</b>	12/24V AC/DC & 120V AC
<b>CCT</b>	3000/4000/5000K(3 in 1)
<b>Lumen</b>	200ml
<b>Beam Spread</b>	120°
<b>CRI</b>	≥85Ra
<b>Working Temp</b>	-40°C ~40°C



<b>Inner Box</b>	5.11"(L)x3.3"(W)x2.0"(H) 13.0(L)*8.4(W)*5.1(H)cm
<b>PCs/Inner Box</b>	1 PC
<b>Master Carton</b>	16.7"(L)x10.0"(W)x10.4"(H) 42.5(L)*26.4(W)*26.5(H)cm
<b>PCs/Master Carton</b>	48 PCS
<b>Product Weights</b>	0.43 LBS / 0.20 KG
<b>Net Weights</b>	20.42 LBS / 9.26 KG
<b>Gross Weights</b>	24.25 LBS / 11.0 KG

### FEATURES

- Engineered for outdoor lighting applications
- 3 CCT in 1
- Shockproof internal structure
- IP65 weatherproof and water-resistant
- Top quality electronic components

### INSTALLATION

- Step 1.** Pull the power supply wires ( 7 ) out from the outlet box ( 1 ) . Mount the mounting bracket ( 3 ) to the outlet box ( 1 ) using the mounting screws ( 2 ) .
- Step 2.** Use the wire nuts ( 4 ) to connect the fixture wires ( 6 ) to the power supply wires ( 7 ) . ( White- Neutral, Black- Live, ).Carefully tuck the wires inside outlet box( 1 ) .
- Step 3.** Select the color temperature from 3000K, 4000K, and 5000K with the toggle switch.
- Step 4.** Snap the face plate ( 5 ) onto the fixture.
- Step 5.** Use sealant ( not included) to fill the gap between the face plate ( 5 ) and the outlet box( 1 ) to improve the water resistance.

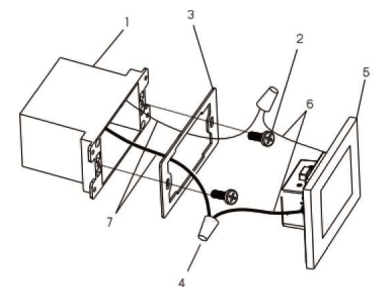

### MATERIALS

Aluminum

### LENS

Frosted PC

### FINISH

ORB

### WARRANTY

3 years warranty