LTTECH

LTTECH

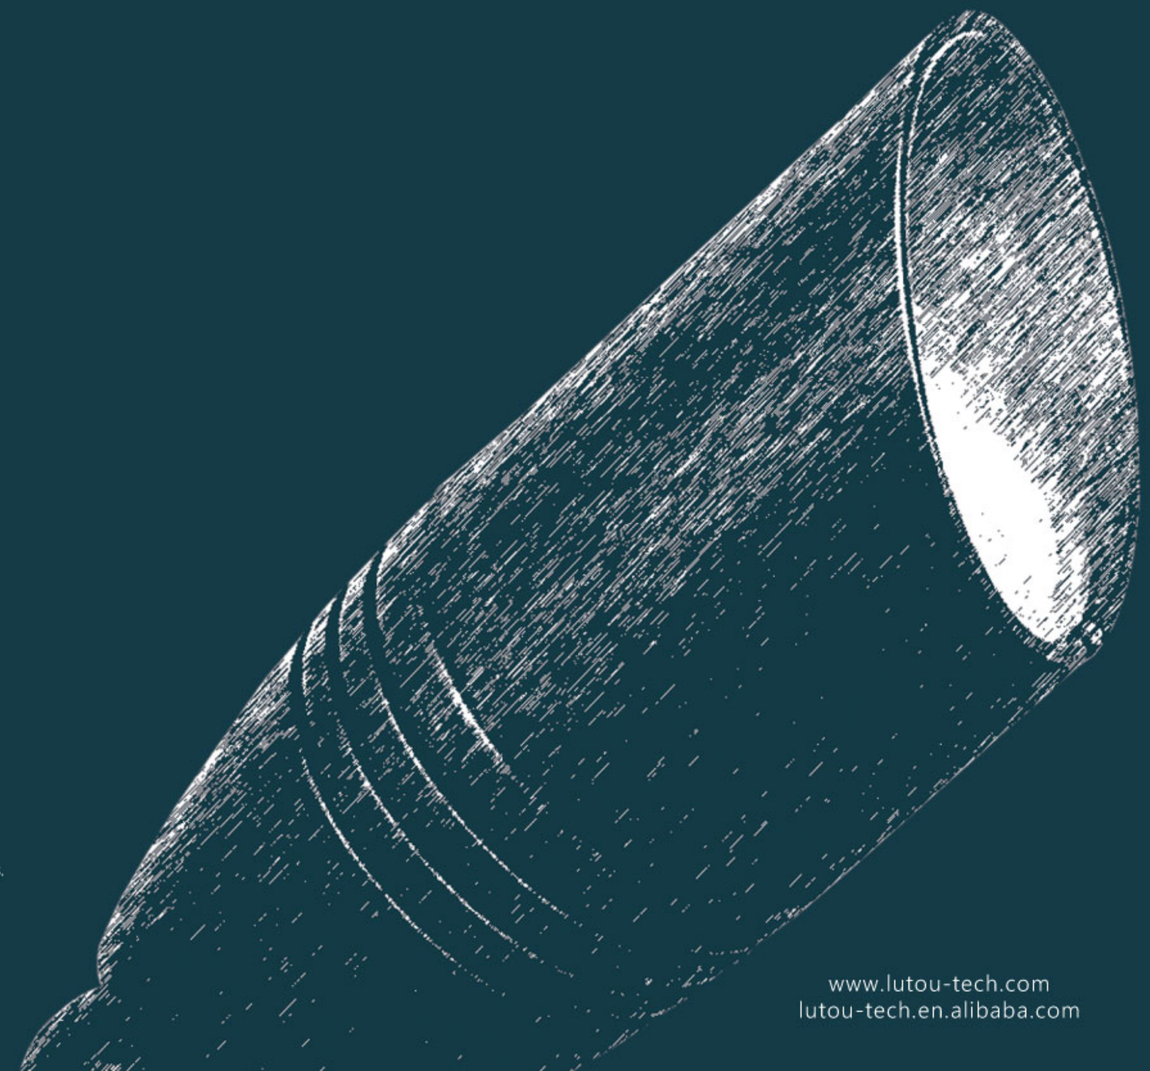

We are passionate about developing excellent quality and innovative products at the most cost-effctive prices.We strive to provide honest customer service to our international business partners.

Lutou Technology Co., Ltd
www.lutou-tech.com/info@lutou-tech.com/+86-755-28716871
Huinan Hi-tech industrial park,Huizhou,Guangdong

© 2022 Lutou Tech

www.lutou-tech.com
lutou-tech.en.alibaba.com

ABOUT LT TECHNOLOGY

LT Technology is a professional manufacturer of high-performance landscape retrofit lamps,fixtures and transformers.Our core team has over 10 years of experience in developing and manufacturing landscape lighting system.
Our customers are all over North America, Europe, Asia and etc.

OUR PURPOSE

We are passionate about developing excellent quality and innovative products at the most cost-effective prices.We strive to provide honest customer service to our international business partners.

CONTENTS

UP LIGHTS	3-6	TRANSFORMERS ACCESSORIES	44
PATH LIGHTS	7-14	MR16	45-48
IN-GROUND LIGHTS	15-20	PAR36	49-50
HARDSCAPE LIGHTS	21-24	MR11	51-52
FLOOD LIGHTS	25-26	MR8	53-54
UNDERWATER LIGHT	27	G4	55-58
DECK LIGHT	28	BAYONET / WEDGE	59-60
WALL SCONCE	29	BISTRO LIGHTS	61-64
DOWN LIGHT	30	HOLIDAY LIGHTS	65-66
INTEGRATED FIXTURES	31-38	LED DIMMER	67-68
FIXTURE ACCESSORIES	39-40	BT SMART POWER SUPPLY	69-70
TRANSFORMERS	41-43	REPEATER	71-72

OUR PRODUCTS

We specialize in customizing landscape lighting products and strive to provide customers with quality materials,high performance,reliability,aesthetics and unique features, which make our products outstanding and more competitive on the market.

Transformers

Path Light

Up Light

In-ground Light


Hardscape Light

Underwater Light

Step Light

Flood Light

UP LIGHTS

IP65



LT2101

LAMP	MR16(not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear convex glass



LT2102

LAMP	MR16(not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear convex glass

UP LIGHTS

IP65



LT2103

LAMP	MR11(not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear flat glass



LT2104

LAMP	MR8(not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear flat glass

UP LIGHTS

IP65

LT2105

LAMP	MR16(not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear convex glass



LT2106

LAMP	MR16(not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear flat glass



UP LIGHTS

IP65

LT2107

LAMP	MR16(not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear convex glass

LT2108

LAMP	MR16(not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear convex glass

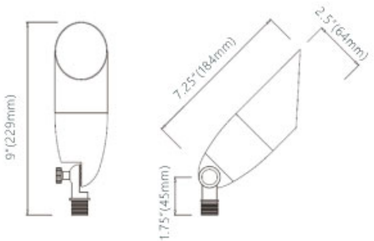

PATH LIGHTS

IP65

LT2401

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted glass

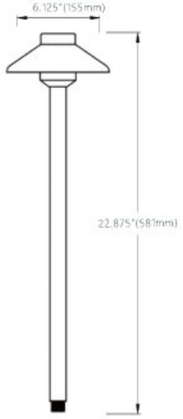

LT2402

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted glass

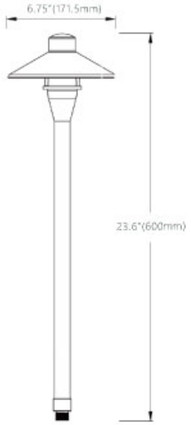

PATH LIGHTS

IP65

LT2403

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted glass

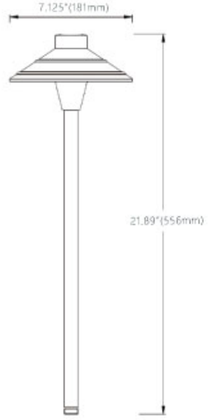

LT2404

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Brass Square Tube
lens	Clear/Frosted PC

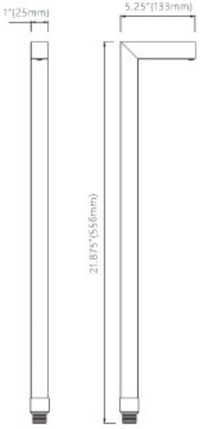

PATH LIGHTS

IP65

LT2405

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted glass

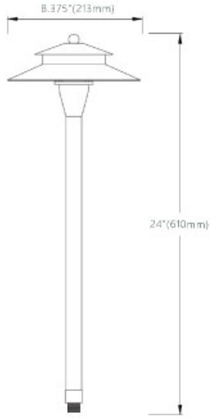

LT2406

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted glass

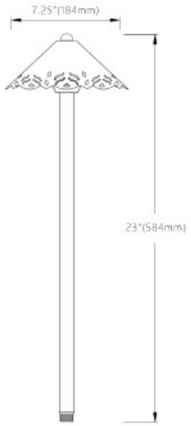

PATH LIGHTS

IP65

LT2411

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted glass

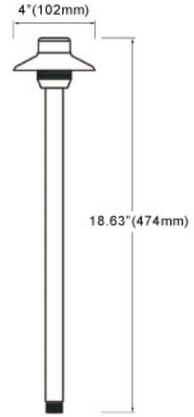

PATH LIGHTS

IP65

LT2412

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted glass

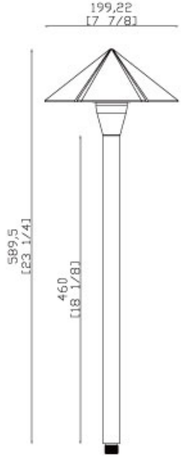

LT2413

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted glass

PATH LIGHTS

IP65

LT2414

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted glass

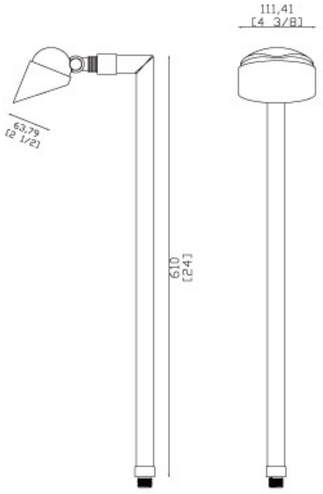

LT2415

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted glass

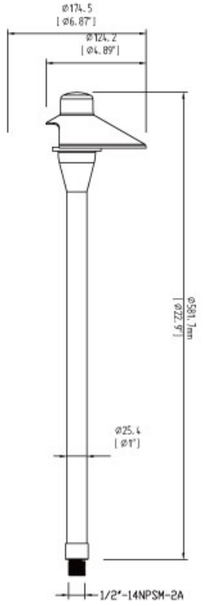

LT2416

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted PC

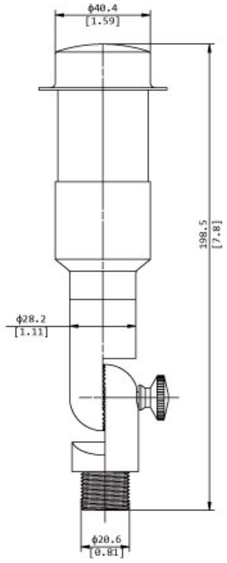

IN-GROUND LIGHTS

IP65



LT2202A

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass



LT2202B

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass

IN-GROUND LIGHTS

IP65



LT2203A

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass



LT2203B

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass

IP65

LT2204A

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass



IN-GROUND LIGHTS

IP65



LT2204B

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass



LT2204C

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass

IN-GROUND LIGHTS



LT2205A

LAMP	PAR36 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass



LT2205B

LAMP	PAR36 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass

IN-GROUND LIGHTS

IP65



LT2206A

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass



LT2206B

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass & PVC
lens	Clear flat glass

HARDSCAPE LIGHTS

BRASS

Shorter mouting bracket

Wall Anchor

SPECIFICATIONS

Wattage	2/3/4W
Lumen	200/300/400LM
Operating Range	9-17V AC/DC
CRI	85
Color Temperature	WW 2700-3000K
	NW 4000K
	CW 6000k
LED Color Available	Red/Green/Blue/Amber
Replaces	20W Halogen
Lamp life	50,000 Hours
Warranty	5 years

FEATURES

IP65 Waterproof
Brass Construction
Fully Potted Electronics
Glare Proof
Replaceable luminaire with modular design

DIMENSIONS

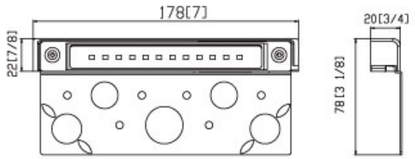

HARDSCAPE LIGHTS

ALUMINUM

Shorter mouting bracket

Wall Anchor

SPECIFICATIONS

Wattage	2/3/4W
Lumen	200/300/400LM
Operating Range	9-17V AC/DC
CRI	85
Color Temperature	WW 2700-3000K
	NW 4000K
	CW 6000k
LED Color Available	Red/Green/Blue/Amber
Replaces	20W Halogen
Lamp life	50,000 Hours
Warranty	5 years

FEATURES

IP65 Waterproof
Aluminum Construction
Fully Potted Electronics
Glare Proof
Replaceable luminaire with modular design

DIMENSIONS

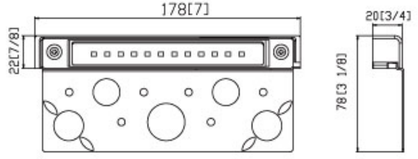

HARDSCAPE LIGHTS

ALUMINUM

LT2702A

LT2702B

LT2702C

SPECIFICATIONS

Wattage	0.5/1.5/2.5W
Lumen	50/160/240LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	WW 2700-3000K
	NW 4000K
	CW 6000k
LED Color Available	Red/Green/Blue/Amber
Replaces	20W Halogen
Lamp life	25,000 Hours
Warranty	3 years

FEATURES

IP65 Waterproof
Aluminum Construction
Fully Potted Electronics

HARDSCAPE LIGHTS

ALUMINUM



LT2702D

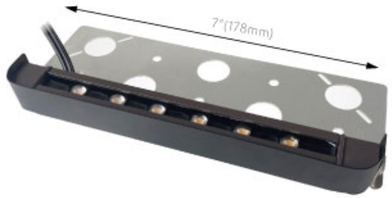

LT2702E

LT2702F

SPECIFICATIONS

Wattage	0.5/1.5/2.5W
Lumen	50/160/240LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	WW 2700-3000K
	NW 4000K
	CW 6000k
LED Color Available	Red/Green/Blue/Amber
Replaces	20W Halogen
Lamp life	25,000 Hours
Warranty	3 years

FEATURES

IP65 Waterproof
Aluminum Construction
Fully Potted Electronics
Rotatable Direction



180 Degrees Rotatable

FLOOD LIGHTS

IP65



LT2301

LAMP	G4 (not included)
Wattage	Up to 25W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted flat glass



LT2302

LAMP	MR16/G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted flat glass

FLOOD LIGHTS

IP65



LT2303

LAMP	G4 (not included)
Wattage	Up to 25W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear/Frosted flat glass



LT2304

LAMP	PAR36 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear flat glass

CHEAPER VERSION



LT2305

LAMP	PAR36 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Brass Sheet
lens	N/A

UNDERWATER LIGHT

IP68

LT2801

LAMP	MR16(not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear flat glass



DECK LIGHT

IP65

LT2601

LAMP	G4 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear flat glass



WALL SCONCE

IP65

LT2602

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear flat glass

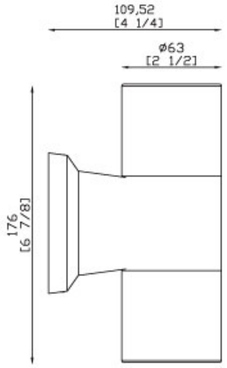

DOWN LIGHT

IP65

LT2603

LAMP	MR16 (not included)
Wattage	Up to 50W
Finish	Antique Bronze
Material	Die-cast Brass
lens	Clear flat glass

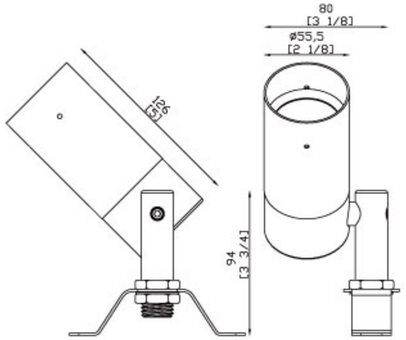

INTEGRATED FIXTURES

ADJUSTABLE WATTAGE AND BRIGHTNESS

LT2501



Wattage	1-5W(Adjustable)
Lumen	80-400LM
Voltage	12VAC/DC
CCT	2700-6000K
Beam Spread	160°
Finish	Antique Bronze
Material	Die-cast Brass
Lens	Clear flat glass

LT2502



Wattage	5W
Lumen	550LM
Voltage	12V AC/DC
CCT	2700-6000K
Beam Spread	120°
Finish	Antique Bronze
Material	Die-cast Brass
Lens	Clear glass

LT2503



Wattage	2W
Lumen	240LM
Voltage	12V AC/DC
CCT	2700-6000K
Beam Spread	120°
Finish	Antique Bronze
Material	Die-cast Brass
Lens	Frosted PC Panel

INTEGRATED FIXTURES

ADJUSTABLE WATTAGE AND BRIGHTNESS

LT2505



Wattage	3-12W (Adjustable)
Lumen	240-840LM
Voltage	12VAC/DC
CCT	2700-6000K
Beam Spread	24/38/60°
Finish	Antique Bronze
Material	Die-cast Brass
Lens	Clear convex glass

Bluetooth
zigbee
CCT Changeable
RGBW

LT2505B



Wattage	12W
Lumen	1440LM
Voltage	12VAC/DC
CCT	Changeable
Beam Spread	24/38/60°
Finish	Antique Bronze
Material	Die-cast Brass
Lens	Clear convex glass

INTEGRATED FIXTURES

Eagle Series

ADJUSTABLE WATTAGE
AND BRIGHTNESS



ETL Intertek IP67

LT2506L

Wattage	6-24W(Adjustable)
Lumen	2000lm(Max)
Voltage	12V AC/DC
CCT	2700-6000K
Beam Spread	20-60°
Finish	Antique Bronze
Material	Die-cast Brass
Lens	Clear flat glass

INTEGRATED FIXTURES

Eagle Series

Bluetooth RGBW



ETL Intertek IP67

Powered By tuya

GET IT ON Google Play

Download on the App Store

LT2506LB

Wattage	1-10W(Adjustable)
Voltage	12V AC/DC
CCT	2700-6000K
Color	RGBW
Beam spread	20-60°(Adjustable)
CRI	85
Lens	Clear flat glass
Control mode	Bluetooth
Waterproof level	IP67
Warranty	5 years

FEATURES

- Bluetooth control available
- Adjustable beam angle from 20° to 60°.
- RGBW controlled by smart phone
- Download Tuya APP to change the settings
- Dimmable is available in smart control or manual operation.

INTEGRATED FIXTURES

LT2507A

Wattage	7W/12W/20W
Lumen	670/1120/1800LM
Voltage	12V AC/DC
CCT	2700-5000K
Beam Spread	160°
Material	Die-cast Aluminum

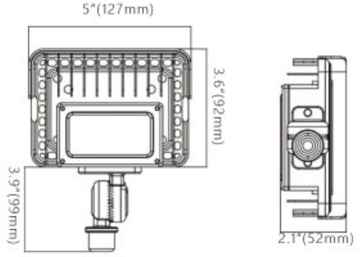

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

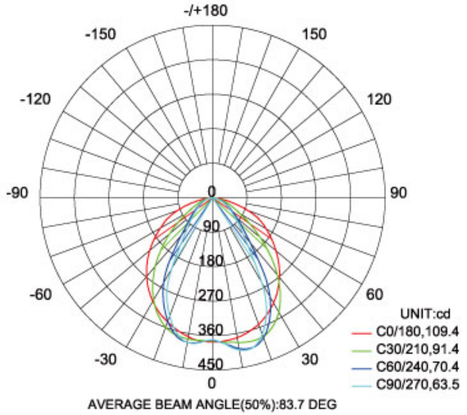

LT2507B

Wattage	40W
Lumen	3400LM
Voltage	12V AC/DC
CCT	2700-5000K
Beam Spread	160°
Material	Die-cast Aluminum

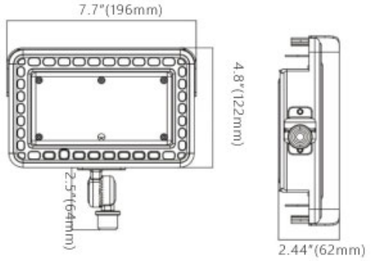

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

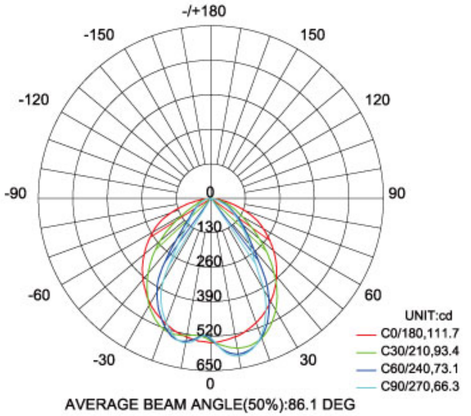

FIXTURE ACCESSORIES

Plastic Stake
LT401A

Brass Stake
LT401C

Plastic Stake
LT401E

Stake Cover
LT401Z

Brass Tree Mount
LT402A

Gutter Mount
LT402C



Hex Louvre Lens
LT403

Brass Locknut
LT404

Wire Connector
LT405

Brass Connector
LT410L

FIXTURE ACCESSORIES

TRANSFORMER

LT3075

Power	75W
Input Voltage	120VAC
Output Voltage	12/15 VAC
Type	Toroidal
Finish	304 Stainless Steel
Size	4.4"x 9.8"x 5"

TRANSFORMER

◂LT3150

Power	150W
Input Voltage	120VAC
Output Voltage	12/13/14/15 VAC
Type	Toroidal
Finish	304 Stainless Steel
Size	6.1"x 13.7"x 5.3"

LT3300▸

Power	300W
Input Voltage	120VAC
Output Voltage	12/13/14/15 VAC
Type	Toroidal
Finish	304 Stainless Steel
Size	6.1"x 13.7"x 5.3"

TRANSFORMER

◀ LT3600

Power	600W
Input Voltage	120VAC
Output Voltage	12/13/14/15/16/17/18/22 VAC
Type	Toroidal
Finish	304 Stainless Steel
Size	7.44"x 16.1"x 6.5"

LT3900 ▶

Power	900W
Input Voltage	120VAC
Output Voltage	12/13/14/15/16/17/18/22 VAC
Type	Toroidal
Finish	304 Stainless Steel
Size	8.46"x 19"x 7.24"

TRANSFORMERS ACCESSORIES

Mechanical timer
LT407M

Digital timer
LT407D

Photocell
LT408

WIFI Socket
LT409

- The MR16 LED lamp designs fit into MR16 fixtures, low voltage.
- These LEDs are engineered thermally to operate in the enclosed fixture and provide extra safety by automatically cooling down,only when exposed to extreme heat(air temperatures above 125F).
- In addition, there is no color shift when lumens output is reduced, and the overall lamp life improved.

LAMP / LT1016A(MR16)

Intertek IP65

SPECIFICATIONS

Wattage	4/5/6/7W
Lumen	360/450/530/600LM
Beam Spread	15/30/45/60/100°
Operating Range	9-17V AC/DC
CRI	85
Color Temperature	WW 2700-3000K
	NW 4000K
	CW 6000k
LED Color Available	Red/Green/Blue/Amber
To Replaces	20/35/50/65W Halogen
Lamp life	50,000 Hours
Warranty	5 years

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

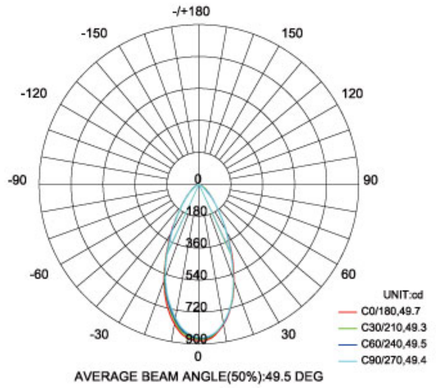

FEATURES

IP65 Waterproof
Self-cooling Device
Fully Potted Electronics

DIMENSIONS



LAMP / LT1016C(6 LED)

IP65

SPECIFICATIONS

Wattage	5/8W
Lumen	550/850LM
Beam Spread	15/30/45/60°
Operating Range	9-17V AC/DC
CRI	85
Color Temperature	WW 2700-3000K
	NW 4000K
	CW 6000k
LED Color Available	Red/Green/Blue/Amber
Lamp life	50,000 Hours
Warranty	5 years

FEATURES

IP65 Waterproof
Self-cooling Device
Fully Potted Electronics

DIMENSIONS



LAMP / LT1016C(Smart)

WiFi Bluetooth RGBW IP65

Powered By tuya

GET IT ON Google Play

Download on the App Store

SPECIFICATIONS

Part#	LT1016C-B/LT1016C-W
Wattage	6W
Voltage	9-17V AC/DC
CCT	2700-6000K
Color	RGBW
Beam spread	15°/30°/45°/60°
CRI	85
Control mode	Bluetooth or WiFi
Waterproof level	IP65
Warranty	5 years

FEATURES

WIFI control and Bluetooth control available
Colors and brightness adjustable by APP
Download Tuya APP to change lamp settings
Control system customizable

DIMENSIONS



LAMP / LT1036(PAR36)

IP67

SPECIFICATIONS

Wattage	6/10/13/17W
Lumen	590/800/1130/1300LM
Beam Spread	38/60°
Operating Range	9-17V AC
CRI	85
Color Temperature	WW 2700-3000K
	NW 4000K
	CW 6000k
LED Color Available	Red/Green/Blue/Amber
To Replaces	35/50/75/100W Halogen
Lamp life	50,000 Hours
Warranty	5 years

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

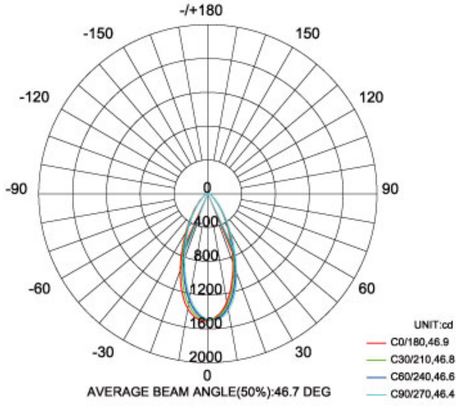

FEATURES

IP67 Waterproof
Self-cooling Device
Fully Potted Electronics

DIMENSIONS



LAMP / LT1036(Smart)

Wi Fi Bluetooth RGBW

IP67

SPECIFICATIONS

Part#	LT1036-B/LT1036-W
Wattage	10W
Voltage	9-17V AC/DC
CCT	2700-6000K
Color	RGBW
Beam spread	38°/60°
CRI	85
Control mode	Bluetooth or Wi Fi
Waterproof level	IP67
Warranty	5 years

FEATURES

IP67 Waterproof
Self-cooling Device
Fully Potted Electronics

Powered By tuya

GET IT ON Google Play

Download on the App Store

DIMENSIONS



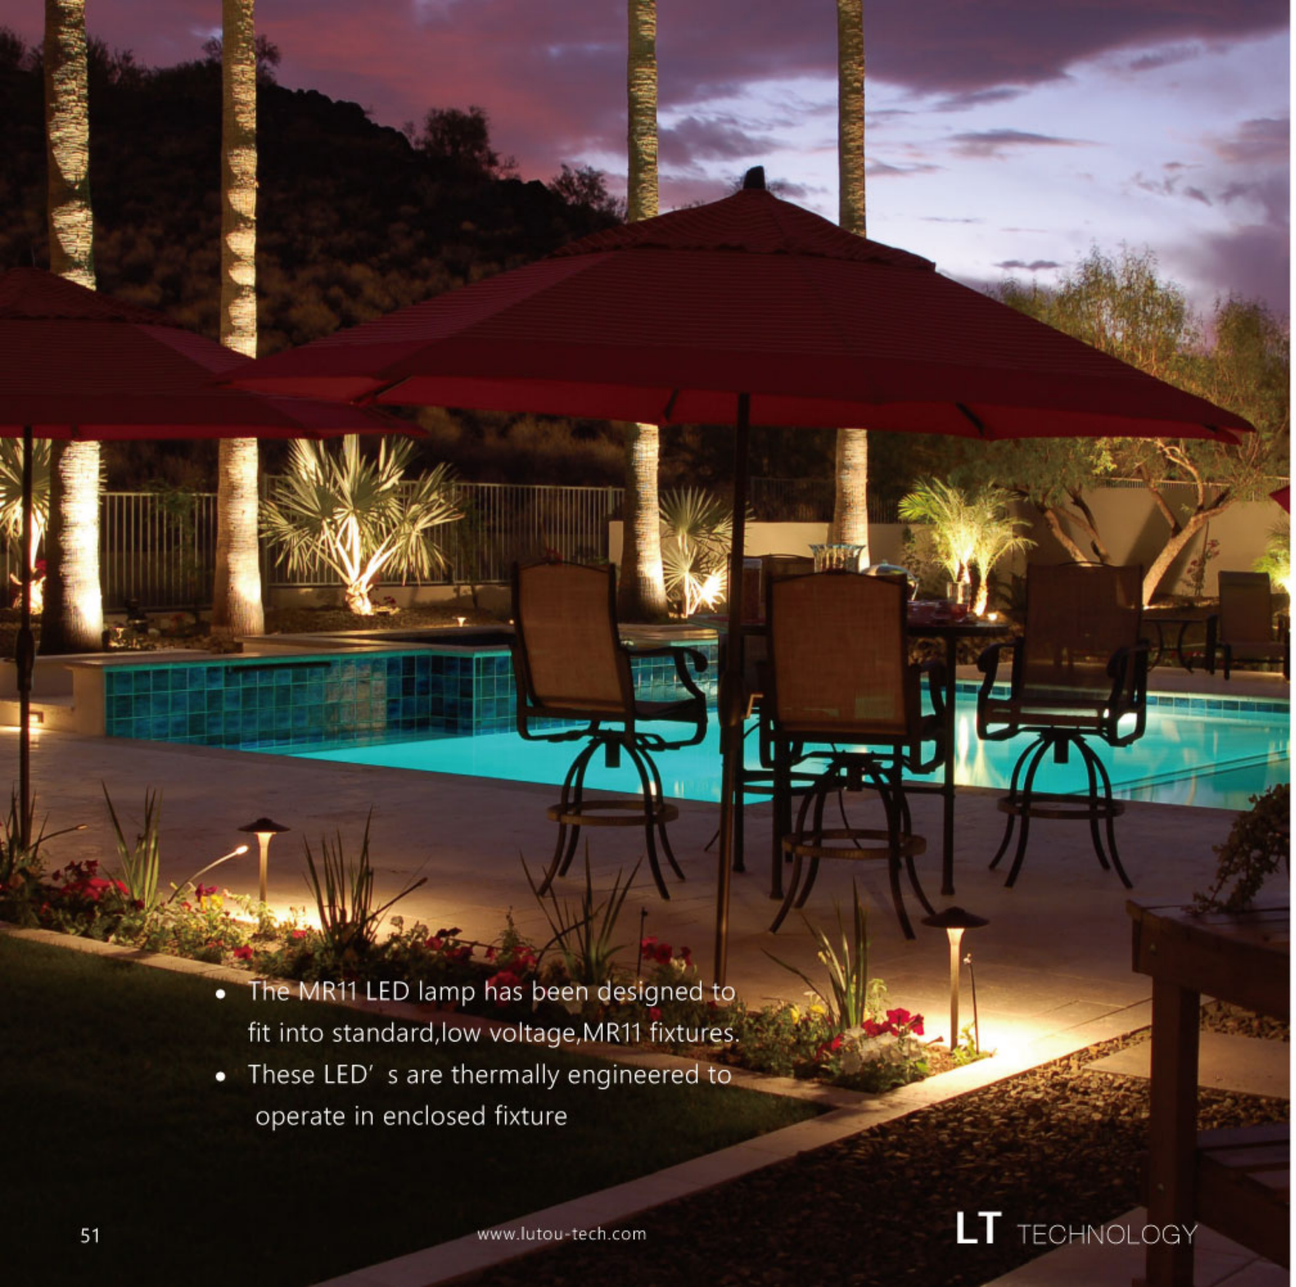

- The MR11 LED lamp has been designed to fit into standard,low voltage,MR11 fixtures.
- These LED’ s are thermally engineered to operate in enclosed fixture

LAMP / LT1011(MR11)

IP54

SPECIFICATIONS

Wattage	2.5W
Lumen	180LM
Beam Spread	38/60/120°
Operating Range	9-17V AC/DC
CRI	85
Color Temperature	WW 2700-3000K
	NW 4000K
	CW 6000k
LED Color Available	Red/Green/Blue/Amber
To Replaces	20W Halogen
Lamp life	50,000 Hours
Warranty	5 years

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

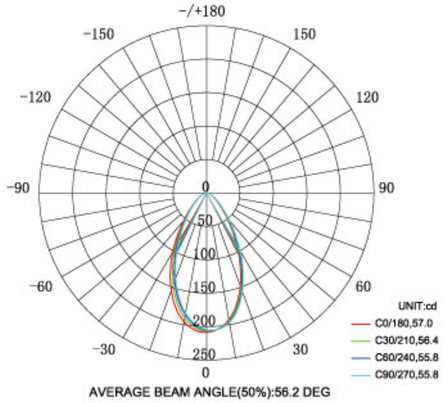

AVERAGE BEAM ANGLE(50%):56.2 DEG

FEATURES

Fully potted electronics and IP54 weatherproof
Suitable for enclosed fixtures and damp location

DIMENSIONS



- The MR8 LED lamp has been designed to fit into standard, low voltage,MR8 fixtures.
- These LED’ s are thermally engineered to operate in enclosed fixture.

LAMP / LT108(MR8)

SPECIFICATIONS

Wattage	2.5W
Lumen	160LM
Beam Spread	38/60/120°
Operating Range	9-17V AC/DC
CRI	85
Color Temperature	WW 2700-3000K
	NW 4000K
	CW 6000k
LED Color Available	Red/Green/Blue/Amber
To Replaces	20W Halogen
Lamp life	50,000 Hours
Warranty	5 years

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

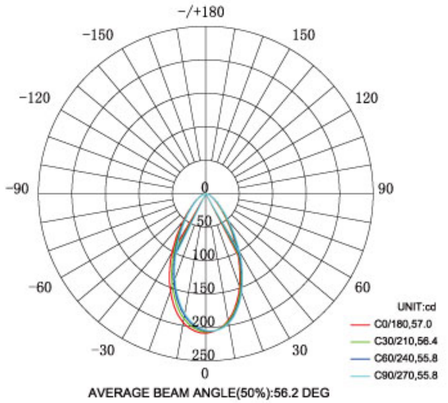

AVERAGE BEAM ANGLE(50%):56.2 DEG

FEATURES

Fully potted electronics and IP54 weatherproof
Suitable for enclosed fixtures and damp location

DIMENSIONS



- The G4 LED lamp has been designed to fit into standard,low voltage,G4 fixtures.
- These LED’ s are thermally engineered to operate in enclosed fixture.

LAMP / LT104(G4)

IP65

SPECIFICATIONS

Wattage	2/3/4W
Lumen	200/300/400LM
Operating Range	9-17V AC/DC
CRI	85
Color Temperature	WW 2700-3000K
	NW 4000K
	CW 6000k
LED Color Available	Red/Green/Blue/Amber
To Replaces	20/30/40W Halogen
Lamp life	50,000 Hours
Warranty	5 years

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

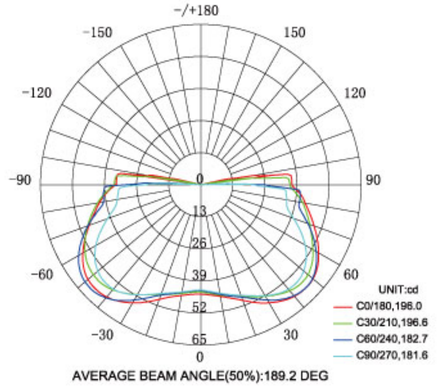

AVERAGE BEAM ANGLE(50%):189.2 DEG

FEATURES

IP65 Waterproof
Brass Construction
Fully Potted Electrionic Components

DIMENSIONS



LAMP

LT104A1

Wattage	2W
Lumen	180LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	2700K-6000K
LED Color Available	Red/Green/Blue/Amber
To Replaces	20-25W Halogen
Lamp life	25,000 Hours
Warranty	3 years

LT104A2



Wattage	3W
Lumen	270LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	2700K-6000K
LED Color Available	Red/Green/Blue/Amber
To Replaces	20-25W Halogen
Lamp life	25,000 Hours
Warranty	3 years

LT104A3



Wattage	2W
Lumen	180LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	2700K-6000K
LED Color Available	Red/Green/Blue/Amber
To Replaces	20-25W Halogen
Lamp life	25,000 Hours
Warranty	3 years

LAMP

LT104A4

Wattage	3W
Lumen	270LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	2700K-6000K
LED Color Available	Red/Green/Blue/Amber
To Replaces	25-30W Halogen
Lamp life	25,000 Hours
Warranty	3 years

LT104A6/LT104A7





Wattage	4W
Lumen	380LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	2700K-6000K
LED Color Available	Red/Green/Blue/Amber
To Replaces	25-30W Halogen
Lamp life	25,000 Hours
Warranty	3 years

LT104A5

Wattage	2W
Operating Range	12V AC/DC
LED Color Available	RGBW
Lamp life	25,000 Hours
Warranty	3 years

IP65



LT104W1

Wattage	1W
Lumen	100LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	2700K-6000K
LED Color Available	Red/Green/Blue/Amber
To Replaces	20-25W Halogen
Lamp life	25,000 Hours
Warranty	3 years

LT104W2

Wattage	3W
Lumen	270LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	2700K-6000K
LED Color Available	Red/Green/Blue/Amber
To Replaces	20-25W Halogen
Lamp life	25,000 Hours
Warranty	3 years

LAMP

IP65



LT104B1/LT104B2

Wattage	1/3W
Lumen	100/270LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	2700K-6000K
LED Color Available	Red/Green/Blue/Amber
To Replaces	10-15W/20-25W Halogen
Lamp life	25,000 Hours
Warranty	3 years



LT104B3

Wattage	5W
Lumen	400LM
Operating Range	12V AC/DC
CRI	85
Color Temperature	2700K-6000K
LED Color Available	Red/Green/Blue/Amber
To Replaces	35-40W Halogen
Lamp life	25,000 Hours
Warranty	3 years

BISTRO LIGHTS

IP65

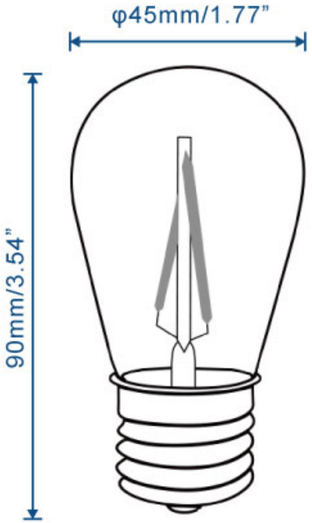

LT6101-12

Wattage	1W
CCT	2200/2700/3000K
LUMENS	75LM
VOLTAGE	12V AC/DC
BASE	MEDIUM (E26)
MATERIAL	Plastic/Glass

LT6101-120

Wattage	2W
CCT	2200/2700/3000K
LUMENS	150LM
VOLTAGE	120V AC
BASE	MEDIUM (E26)
MATERIAL	Plastic/Glass

BISTRO LIGHTS

IP65

LT6201

LT6202

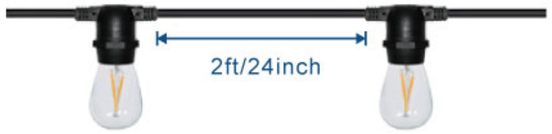

48ft
576inch

24
Sockets

24+1
S14 Bulbs

E26 Base

16/18/20
Gauge
For Options

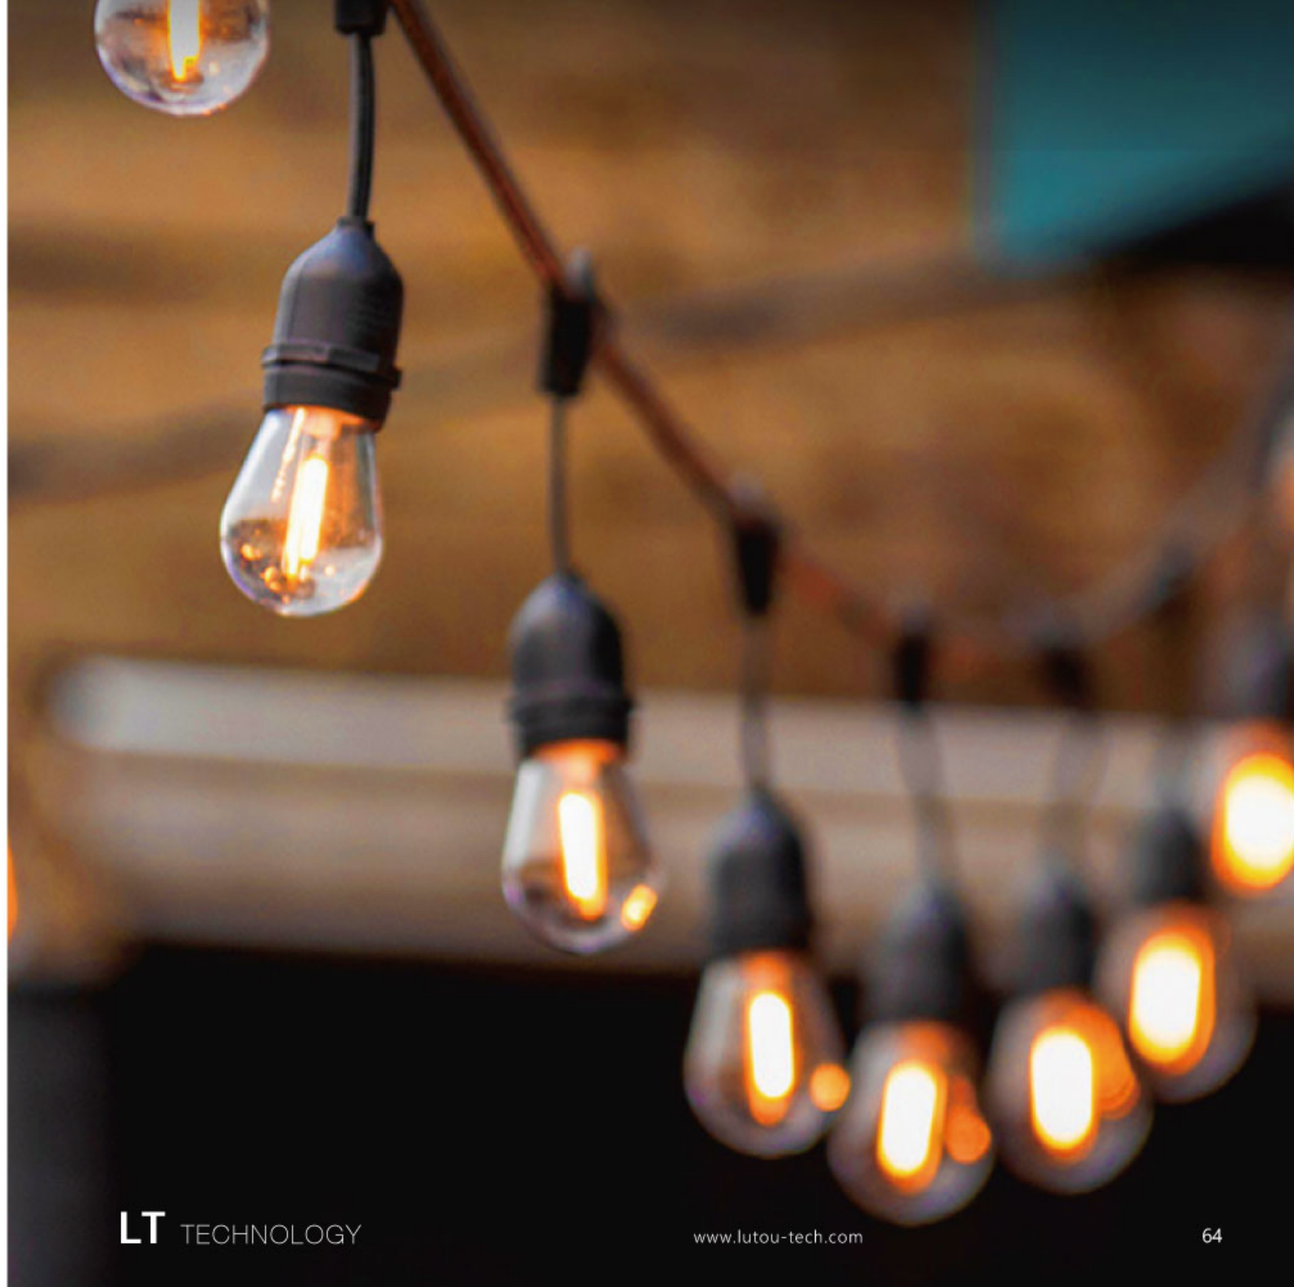

HOLIDAY LIGHTS

LT6301

120V 5MM MINI LED STRING

WATTAGE	14.4W
VOLTAGE	110VAC
LED Color	Multiple Color Available
LED QTY.	100L
WIRE	22AWG CXTW
SIZE	4*4*4mm
PLUG	Normal Plug/Female Plug

LT6901-A01
Y SPLITER

LT6901-A02
X SPLITER

LT6901-A03
1FT lead and IP44 coaxial connection CXTW22#

LT6901-A04
3FT Commercial string extension cord

HOLIDAY LIGHTS

LT6102-C

TYPE	C7/C9
WATTAGE	0.5W
VOLTAGE	110VAC
LED Color	Red/Yellow/Green
BASE	C7-E12/C9-E17

LT6102-M

TYPE	C7/C9
WATTAGE	0.8W
VOLTAGE	110VAC
Color	Multi-color
BASE	C7-E12/C9-E17

LT6203

TYPE	C7/C9
VOLTAGE	110VAC
BASE	C7-E12/C9-E17
SIZE	1000L/1000FT
WIRE	18AWG SPT-1W

LT6901-A05
Female(Male) plug/
For 18AWG SPT-1 Wire

LT6901-A06
Stake

LT6901-A07
Shingle tab

LT6901-A08
Socket Magnet clip

LED DIMMER

IP65

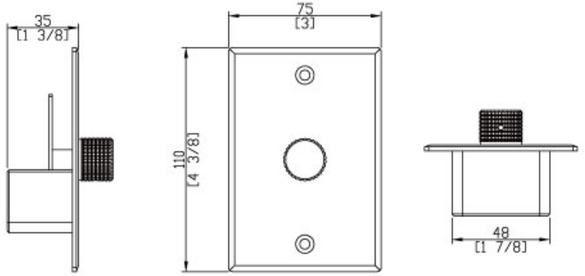

LT411B

Watts	50/100W
Input Voltage	12~17VAC
Frequency	50~60Hz
Input Current	10A max
Output Voltage	4~12VDC
Output Current	9A max
Housing Material	Aluminum
Warranty Period	5 years

BT SMART POWER SUPPLY

Bluetooth IP65

LT7001

- **Product Name** Bluetooth Smart Power Supply
- **Power Adaptor** Input voltage: 100-240VAC; Output: 15V 5A
- **Power** Output Voltage: 12.6VDC MAX; Output current: 3A MAX
- **Charging Maximum Current** 2A (It takes 4 to 5 hours to fulfill)
- **Short circuit protection**
- **Low voltage protection**
- **Overheat protection**

DIMENSIONS

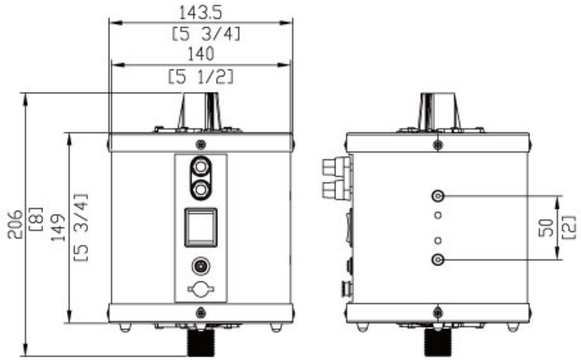

Product Overview

This is LT New Arrival - An outdoor smart battery kit, equipped with a 10Ah lithium battery and the output voltage is 12.6V DC, widely used for the landscape lighting display, shows & demonstrations.

Main Features

- Manual switches
- Bluetooth control available (Tuya system)
- Chargeable
- Portable size to make it flexible for various applications

SMART BLUETOOTH REPEATER

Bluetooth IP65

LT5101

Product Name	Smart Bluetooth Repeater
Operating Voltage	12V AC/DC
Frequency Range	2400-2500（MHz）
Output Impedance	50（Ω）
Voltage Standing Wave Ratio≤	1.8（dB）
Antenna type	2.4G Blutooth gain antenna
Operating system	Tuya smart
Maximum coverage radius	80 meters (without any obstacle)
IP Rate	IP 65
Material	Aluminum, PVC
Operating Temperature	-40℃~40℃

DIMENSIONS

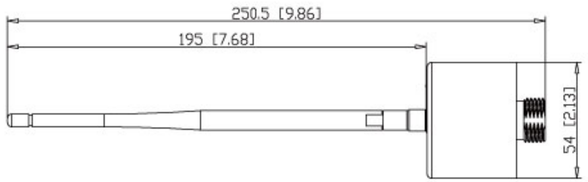

INSTRUCTION

1. Download Tuya App
2. Open App and power the device
3. For the first time use. please reset the repeater by pressing switch button for 4 times.
4. Tap the"+" icon on top right corner. tap"add device". the icon of bluetooth repeater should pop automatically. Add the bluetooth repeater.
5. Rename the device.
6. Create the groups for the items that need to be controlled. then it works.

* The repeater can only be used for the Tuya sig mesh Bluetooth products.

Power By tuya

ANDROID APP ON Google play

Available on the App Store