


LT LED MR16(3 LED)

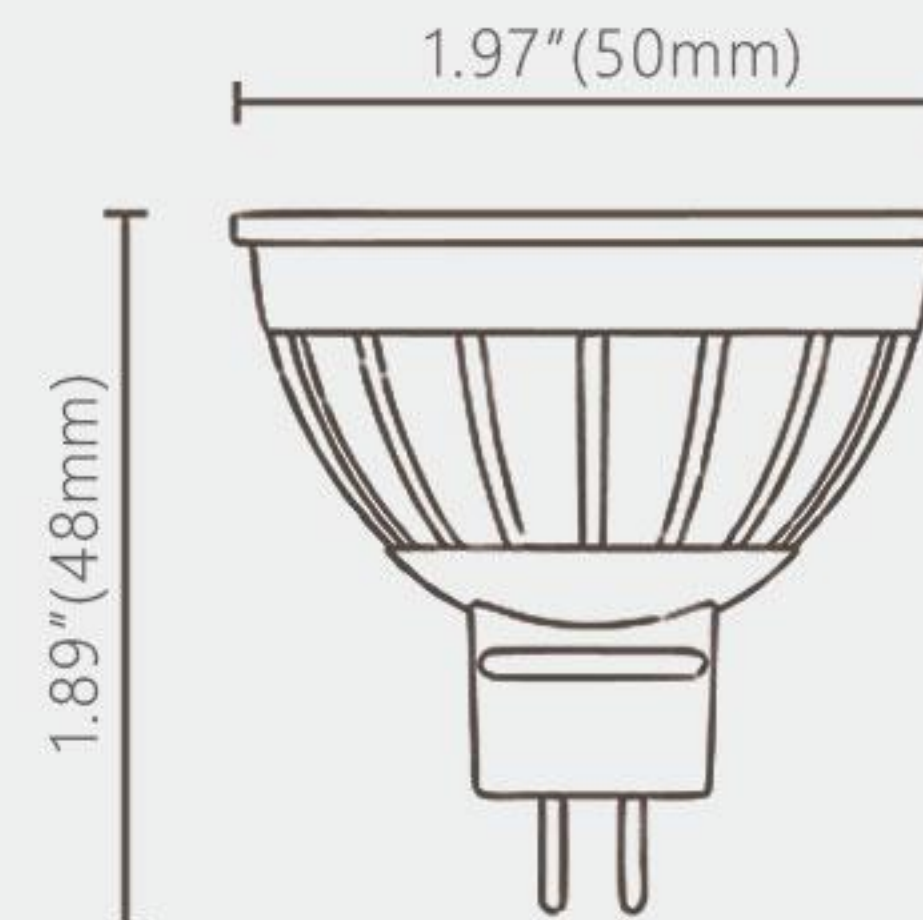

LT1016A(MR16A)

Specs

Part#	Wattage	Voltage	CCT	Lumen	Beam Spread	CRI
LT1016A-4W	4W	9-17V	2700K-6000K	360lm	15/30/45/60/100°	85
LT1016A-5W	5W	9-17V	2700K-6000K	450lm	15/30/45/60/100°	85
LT1016A-6W	6W	9-17V	2700K-6000K	530lm	15/30/45/60/100°	85
LT1016A-7W	7W	9-17V	2700K-6000K	610lm	15/30/45/60/100°	85

Features

- Suitable for damp locations
- Overheating protection
- Rated for outdoor use in an enclosed fixture
- Operating temperature -4°F-122°F
- Dimmable with most magnetic transformer
- Fully potted electronics

Materials

Die-cast Aluminum

Warranty


5 years warranty

LED Color Available

Red/Green/Blue/Amber



LT LED MR16(6 LED)

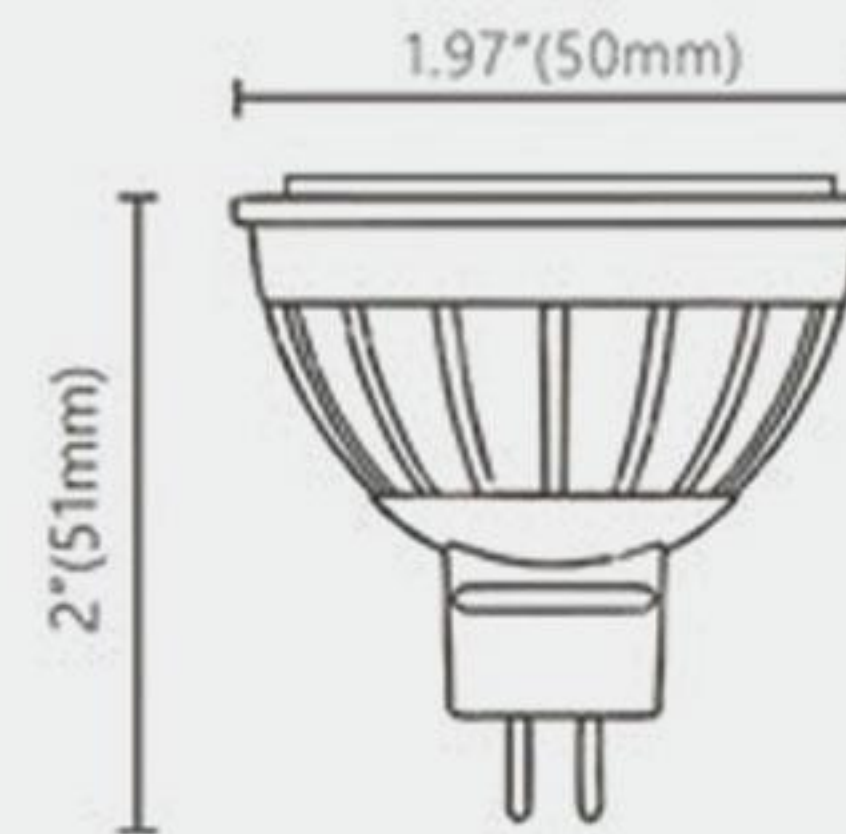

LT1016C(MR16C)

Specs

Part#	Wattage	Voltage	CCT	Lumen	Beam Spread	CRI
LT1016C-5W	5W	9-17V	2700K-6000K	550lm	15/30/45/60°	85
LT1016C-8W	8W	9-17V	2700K-6000K	850lm	15/30/45/60°	85

Features

- Suitable for damp locations
- Overheating protection
- Rated for outdoor use in an enclosed fixture
- Operating temperature -4°F-122°F
- Dimmable with most magnetic transformer
- Fully potted electronics

Materials


Die-cast Aluminum

Warranty

5 years warranty

LED Color Available

Red/Green/Blue/Amber

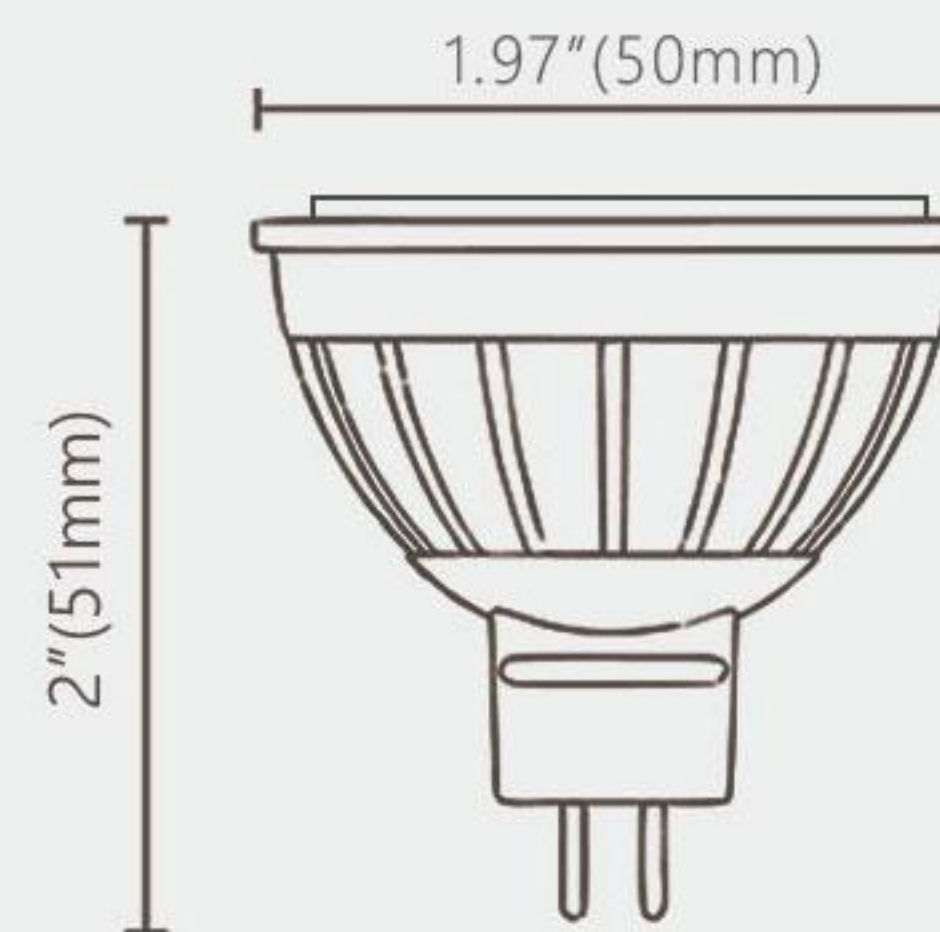

SPECS

Part#	LT1016C-BT/LT1016C-WF
Wattage	6W
Voltage	9-17VAC/DC
CCT	2700-6000K
Color	RGBW
Beam spread	15°/30°/45°/60°
CRI	>80
Control mode	Bluetooth® or Wi-Fi
Waterproof level	IP65



FEATURES

- WIFI control and Bluetooth control available
- Colors and brightness adjustable by APP
- Download Tuya APP to change lamp settings
- Control system customizable

MATERIALS


Die-cast aluminum

WARRANTY

5 years warranty



LT LED PAR36/AR111

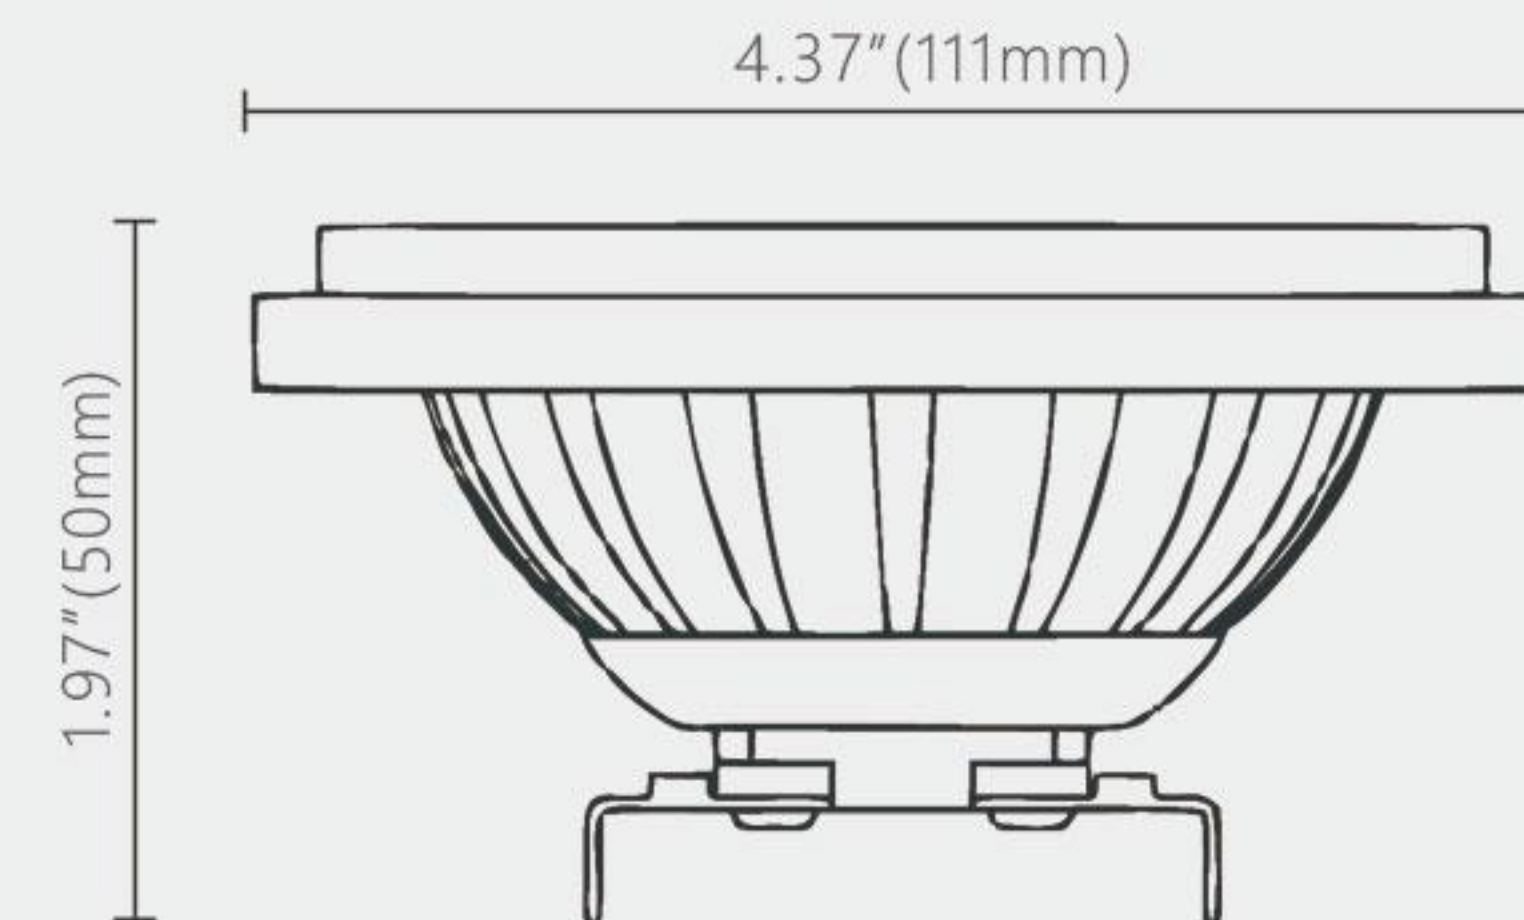

LT1036(PAR36)

Specs

Part#	Wattage	Voltage	CCT	Lumen	Beam Spread	CRI
LT1036-6W	6W	9-17V	2700K-6000K	590lm	38/60°	85
LT1036-10W	10W	9-17V	2700K-6000K	800lm	38/60°	85
LT1036-13W	13W	9-17V	2700K-6000K	1130lm	38/60°	85
LT1036-17W	17W	9-17V	2700K-6000K	1300lm	38/60°	85

Features

- Suitable for damp locations
- Overheating protection
- Rated for outdoor use in an enclosed fixture
- Operating temperature -4°F-122°F
- Dimmable with most magnetic transformer
- Fully potted electronics

Materials

Die-cast Aluminum


LED Color Available

Red/Green/Blue/Amber

Warranty

5 years warranty



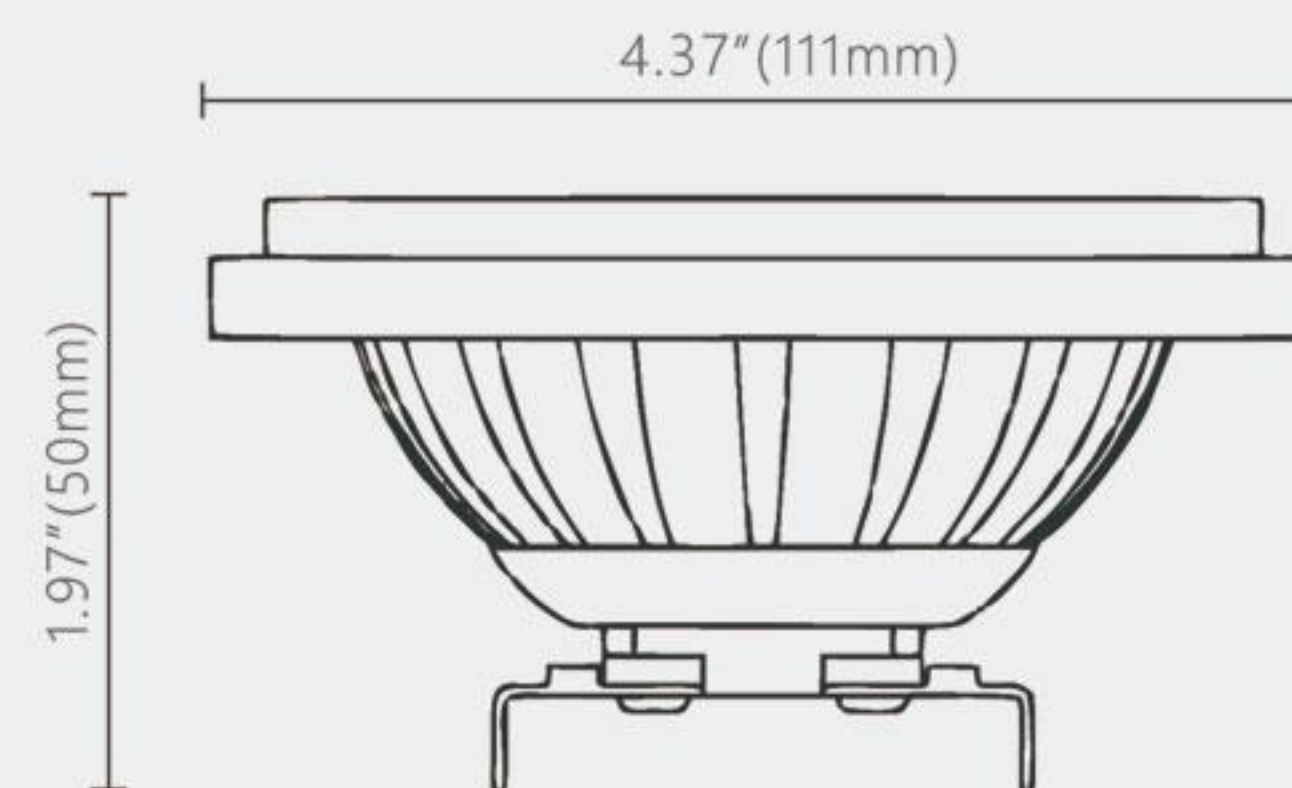

SPECS

Part#	LT1036-B/LT1036-W
Wattage	10W
Voltage	9-17VAC/DC
CCT	2700-6000K
Color	RGBW
Beam spread	38°/60°
CRI	>80
Control mode	Bluetooth® or Wi-Fi
Waterproof level	IP67



FEATURES

- WIFI control and Bluetooth control available
- Colors and brightness adjustable by APP
- Download Tuya APP to change lamp settings
- Control system customizable

MATERIALS

Die-cast aluminum


WARRANTY

5 years warranty





LT1011(MR11)

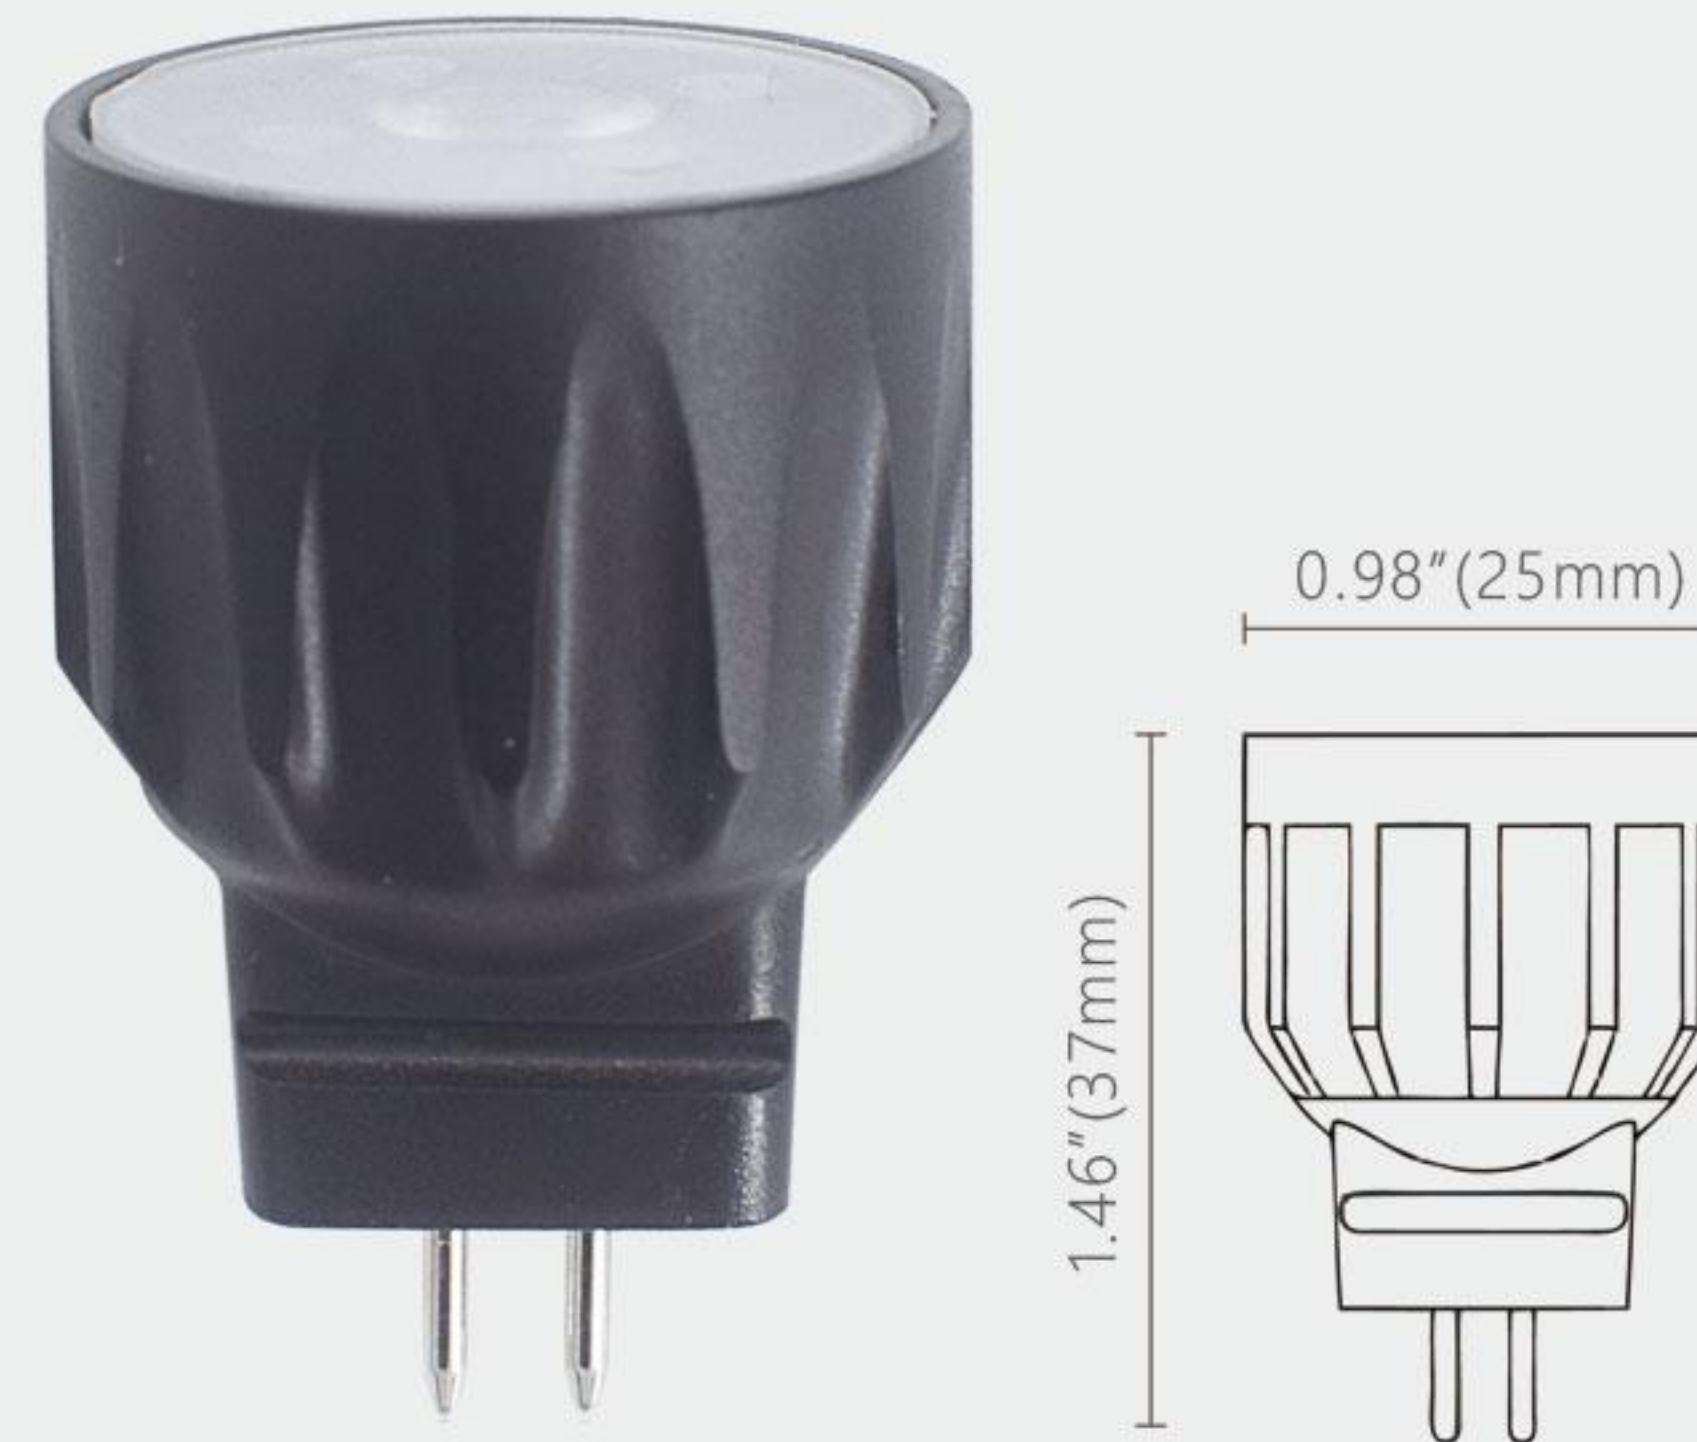

LT108(MR8)

Specs

Part#	Wattage	Voltage	CCT	Lumen	Beam Spread	CRI
LT1011	2.5W	9-17V	2700K-6000K	180lm	38/60/120°	85
LT108	2.5W	9-17V	2700K-6000K	160lm	38/60/120°	85

Features

- Suitable for damp locations
- Rated for outdoor use in an enclosed fixture
- Operating temperature -4° F-122° F
- Dimmable with most magnetic transformer
- Fully potted electronics

Materials

Die-cast Aluminum


Warranty

5 years warranty

LED Color Available

Red/Green/Blue/Amber

LT LED G4 (Brass)

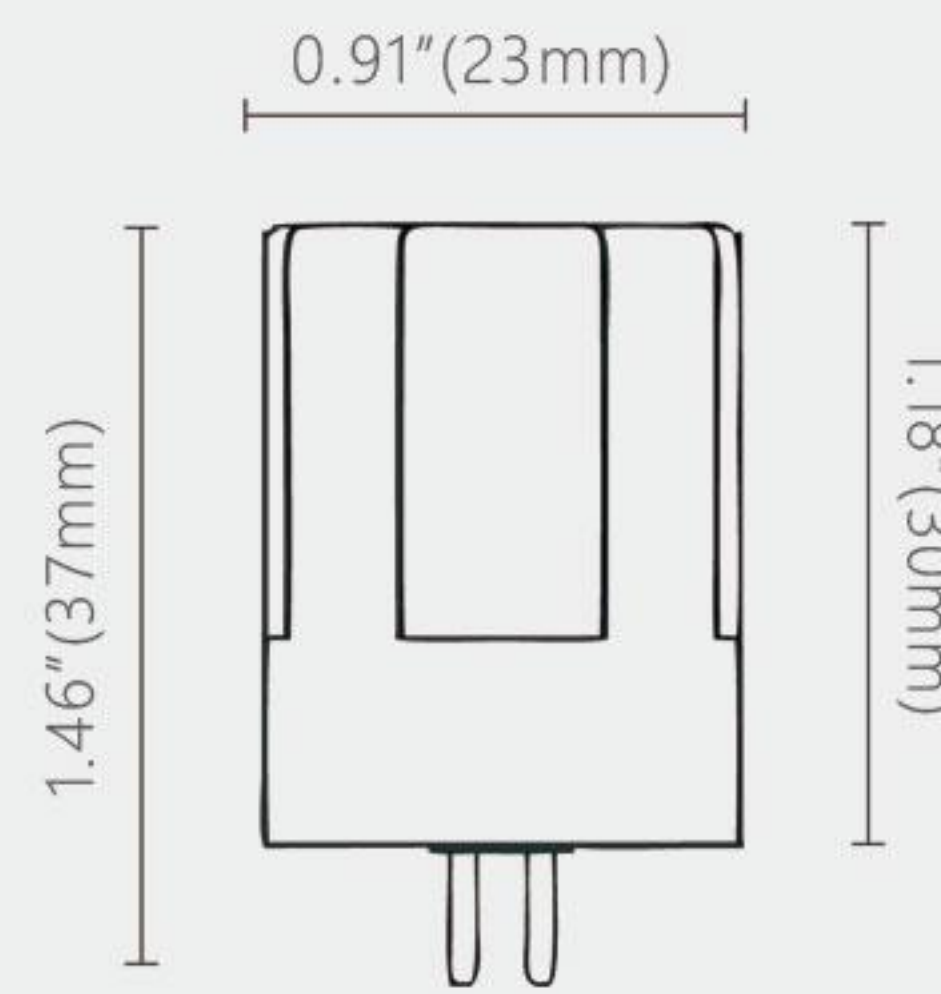

LT104P(G4)

Specs

Part#	Wattage	Voltage	CCT	Lumen	CRI
LT104P-2W	2W	9-17V	2700K-6000K	200lm	85
LT104P-3W	3W	9-17V	2700K-6000K	300lm	85
LT104P-4W	4W	9-17V	2700K-6000K	400lm	85

Features

- Suitable for damp locations
- Rated for outdoor use in an enclosed fixture
- Operating temperature -4°F-122°F
- Dimmable with most magnetic transformer
- Fully potted electronics

Materials

Die-cast Brass

LED Color Available

Red/Green/Blue/Amber


Warranty

5 years warranty

LT LED G4 (Silicone or Ceramic)



LT104A1

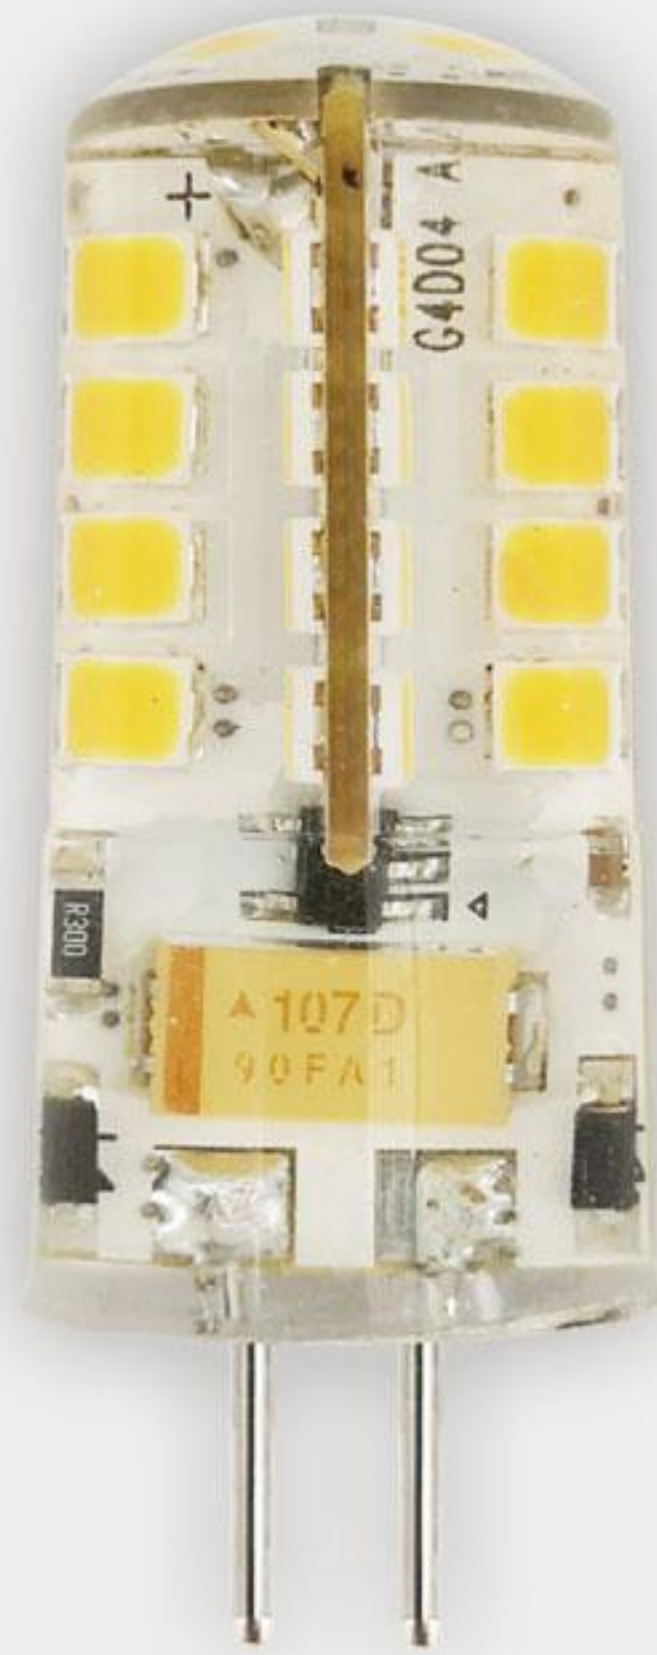

LT104A2



LT104A3



LT104A4



LT104A5

Specs

Part#	Size	Wattage	Voltage	CCT	Lumen	CRI
LT104A1	Ø10*36mm	2W	12V AC/DC	2700K±150K	180lm	85
LT104A2	Ø16*42mm	3W	12V AC/DC	2700K±150K	270lm	85
LT104A3	Ø14.6*38mm	2W	12V AC/DC	2700K±150K	180lm	85
LT104A4	Ø16*43mm	3W	12V AC/DC	2700K±150K	270lm	85
LT104A5	Ø18*46mm	2W	12V AC/DC	WI-FI RGB	\	\

Features

- Suitable for damp locations
- Rated for outdoor use in an enclosed fixture
- Operating temperature -4°F-122°F
- Dimmable with most magnetic transformer
- Fully potted electronics

Materials

Silicone or Ceramic


LED Color Available

Red/Green/Blue/Amber

Warranty

3 years warranty



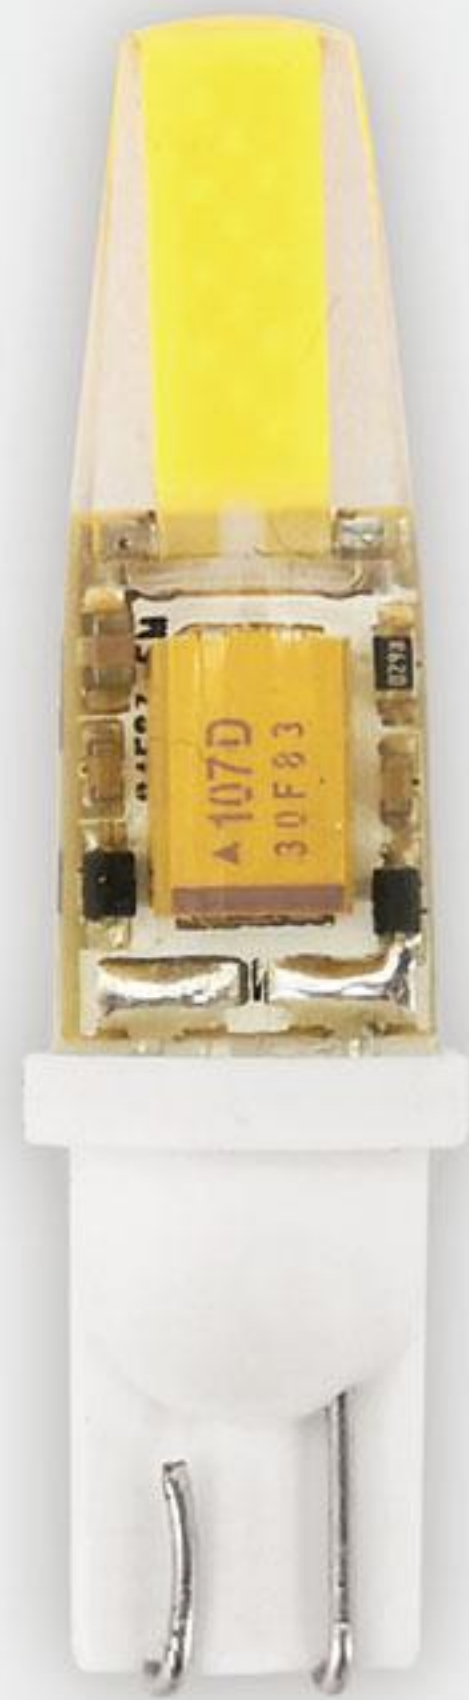

LT10W1



LT10W2

Specs

Part#	Size	Wattage	Voltage	CCT	Lumen	CRI
LT10W1	Ø11.5*42mm	1W	12V AC/DC	2700K±150K	200lm	85
LT10W2	Ø18*45mm	3W	12V AC/DC	2700K±150K	200lm	85

Features

- Suitable for damp locations
- Rated for outdoor use in an enclosed fixture
- Operating temperature -4°F-122°F
- Dimmable with most magnetic transformer
- Fully potted electronics

Materials

Silicone

LED Color Available

Red/Green/Blue/Amber

Warranty

3 years warranty



LT10B1/LT10B2



LT10B3

Specs

Part#	Size	Wattage	Voltage	CCT	Lumen	CRI
LT10B1	Ø17*45mm	1W	12V AC/DC	2700K±150K	100lm	85
LT10B2	Ø17*45mm	3W	12V AC/DC	2700K±150K	200lm	85
LT10B3	Ø17*56mm	5W	12V AC/DC	2700K±150K	400lm	85

Features

- Suitable for damp locations
- Rated for outdoor use in an enclosed fixture
- Operating temperature -4°F-122°F
- Dimmable with most magnetic transformer
- Fully potted electronics

Materials

Silicone or Ceramic

LED Color Available

Red/Green/Blue/Amber

Warranty

3 years warranty