

PRODUCT FEATURES

Lamp Type	Led Module
Wattage	0 – 8W(adjustable)
Voltage	9 – 17V AC/DC
Lead wire	Pre-stripped SPT-1W 18AWG, L=72"
IP Rating	IP65
Lens Material	Clear Flat Glass Lens
Housing	Solid Brass
Finish	AB Antique Bronze / GM Gun Metal Black / MB Matte Black
Dimensions	2.24" DIA x 5.79" L
Color temperature	RGB-CCT / 2700-6000K
Lumen	Max 680lm
Smart Control	Tuya App



ORDERING INFORMATION

CATAGORY	MODEL	FINISH	LAMP	ACCESSORIES
UP LIGHT	LT2100BT	AB Antique Bronze GM Gun Metal Black MB Matte Black	0 – 8W	<div> <div>LT402A</div> <div>Brass surface mount canopy</div> </div> <div> <div>LT402H</div> <div>Brass surface mount flat canopy</div> </div> <div> <div>LT402C</div> <div>Stainless steel and brass gutter mount</div> </div> <div> <div>LT402E</div> <div>Brass tree mount</div> </div> <div> <div>LT402F</div> <div>Aluminum surface mounting base</div> </div> <div> <div>LT404</div> <div>Brass locknut</div> </div> <div> <div>LT406A3</div> <div>Brass riser 3"</div> </div> <div> <div>LT406A7</div> <div>Brass riser 7"</div> </div> <div> <div>LT406A12</div> <div>Brass riser 12"</div> </div> <div> <div>LT406A18</div> <div>Brass riser 18"</div> </div> <div> <div>LT406A24</div> <div>Brass riser 24"</div> </div> <div> <div>LT406ES20</div> <div>Brass extendable riser, DIA 0.98", 16.72"-29.63" long</div> </div> <div> <div>LT406ES25</div> <div>Brass extendable riser DIA0.78",16.19" - 28" long</div> </div> <div> <div>LT406ER18</div> <div>90 degree elbow riser fpt x mpt 18" long</div> </div> <div> <div>LT406ER24</div> <div>90 degree elbow riser fpt x mpt 24" long</div> </div> <div> <div>LT410L</div> <div>Brass connector L shape</div> </div> <div> <div>LT410T</div> <div>Brass T connector</div> </div> <div> <div>LT410Z</div> <div>Brass I Connector</div> </div> <div>Please consult for details on other optional accessories.</div>



MODEL LT2100BT | Specification Sheet

UP LIGHT

SPECIFICATIONS

HOUSING CONSTRUCTION:

Solid brass.

FINISH:

Antique Bronze.
Gun Metal Black.
Matte Black.

LENS:

Clear flat glass lens.

GROUND STAKE:

Included.

WIRING:

Prewired with 72" 18/2 AWG Lead Wire.

LED LIGHT SOURCE


Integrated LED Module.

ELECTRICAL:

Input voltage range 9 - 17V AC/DC.

Low voltage transformer required to operate (sold separately).

DIMENSIONS

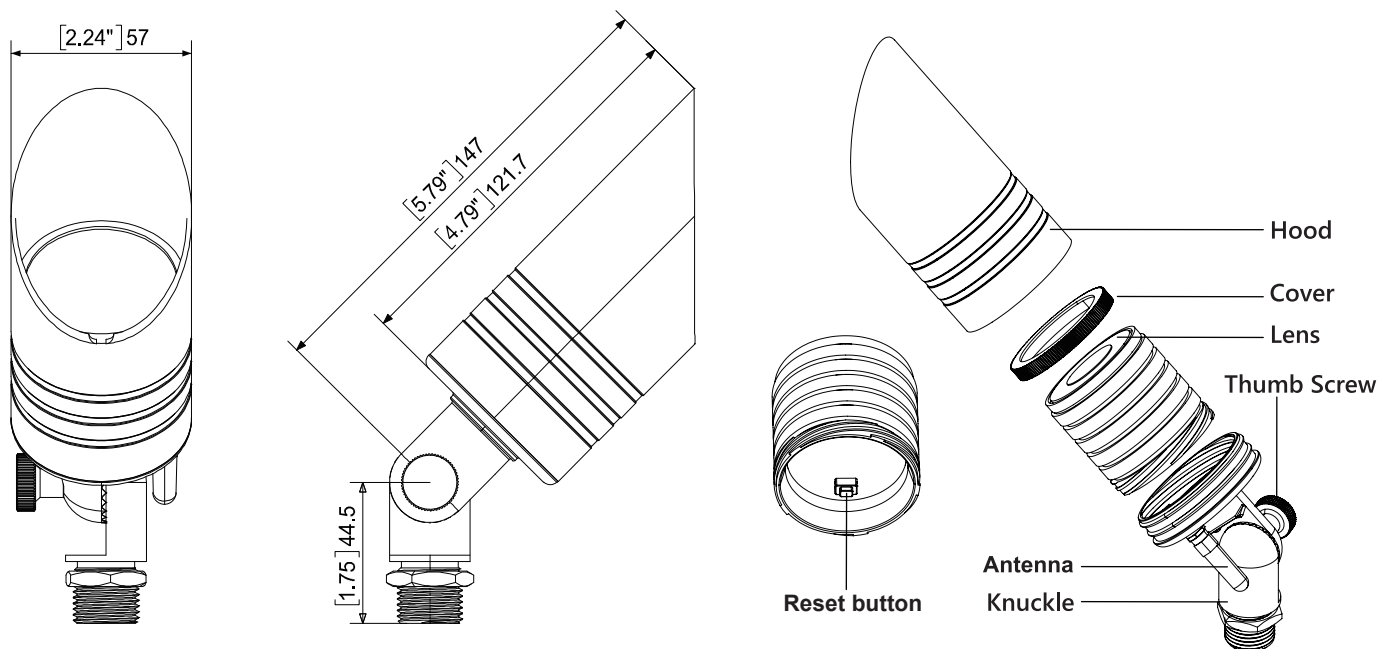

PROFESSIONAL
OUTDOOR LIGHTING

Lutou Technology Co., Ltd
Shenzhen | Huizhou | Taizhou | L.A.
www.lutou-tech.com | info@lutou-tech.com | +86-755-28716871
Lutou Tech Professional Outdoor Lighting reserves the right to modify the design and/or construction
of the fixture shown without further notification.